(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 29 September 2005 (29.09.2005)

(10) International Publication Number WO 2005/090876 A1

(51) International Patent Classification7: E21B 10/12, A01K 97/01

F25C 5/04,

(21) International Application Number:

PCT/FI2005/000158

(22) International Filing Date: 18 March 2005 (18.03.2005)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data: 20040425

19 March 2004 (19.03.2004) FI

(71) Applicant (for all designated States except US): KON-SAKU OY [FI/FI]; Arrakoskentie 59, FI-17530 Arrakoski

- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ROSNELL, Markku [FI/FI]; Ylä-Narvantie 5, FI-37370 Vesilahti (FI).
- (74) Agent: KANGASMÄKI, Reijo; Finnish Patent Consulting FPC, Hermiankatu 14, FI-33720 Tampere (F1).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: BLADE ASSEMBLY ESPECIALLY FOR AN ICE AUGER OR LIKE

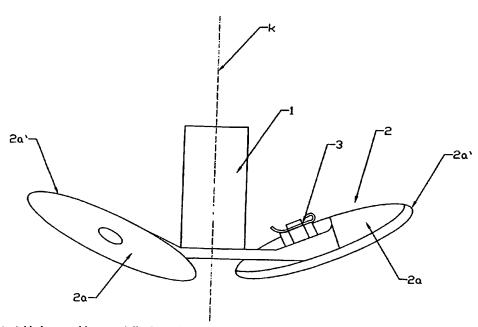

(57) Abstract: A blade assembly, especially for an ice auger or the like, comprising a shank (1) and a bit head (2). The shank (1) is provided at least with elements (3) for mounting the bit head (2). The bit head (2), in turn, includes one or more disk-shaped bit members (2a), which rotate (w) during a drilling/boring operation and which have an outer rim (2a') thereof working as an actual cutting face in drilling/boring. The rotary bit member (2a) included in the bit head is disposed at an angle (a) of less than 45° relative to a drilled surface (A).

2005/090876 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.